



PV Fluid Products

SPECIFICATION SHEET FOR: 6 3/4" 7:8 LOBE 5.7 STAGE TR75 GROUP 4

PV675757-TR-4


Rotor Details	
Overall Length (in)	252.0
Head Length (in)	7.00
Head Diameter (in)	4.50
Contour OD (in)	4.646
Ecc (in)	0.247
C to V (in)	4.153
Weight (lbs)	866.0
Std Connection	2 7/8" Reg

Stator Details	
Overall Length (in)	260.0
Tube OD (in)	6.75
Tube ID (in)	5.50
Alternate OD (in)	7.00
Std Cutbacks (in)	8.00
Weight (lbs)	957

Recommended Operating Range	
Flow Rate	300 gpm-600 gpm
No Load RPM	72-144
Displacement	0.24 revs/gal
Max Working Pressure	1081 psi
Max Off-BTM Pressure	130 psi
Max Operating Torque	10299 ft-lbs
Torque Slope	10.058 ft-lbs/psi
Max Operating pressure = Max Working psi - Max Off-BTM psi	
For Maximum Life do not exceed 951 psi differential.	

Sizing and Fit Information	
Vector Minor (in)	4.169
Shop Fit @ 70°F	- 0.016 Loose
Temp Correction Factor*	5.5
* Temp correction factor is the degrees (F) required to change the stator size by .001" on diameter.	

Theoretical performance with water at Operating Temperature

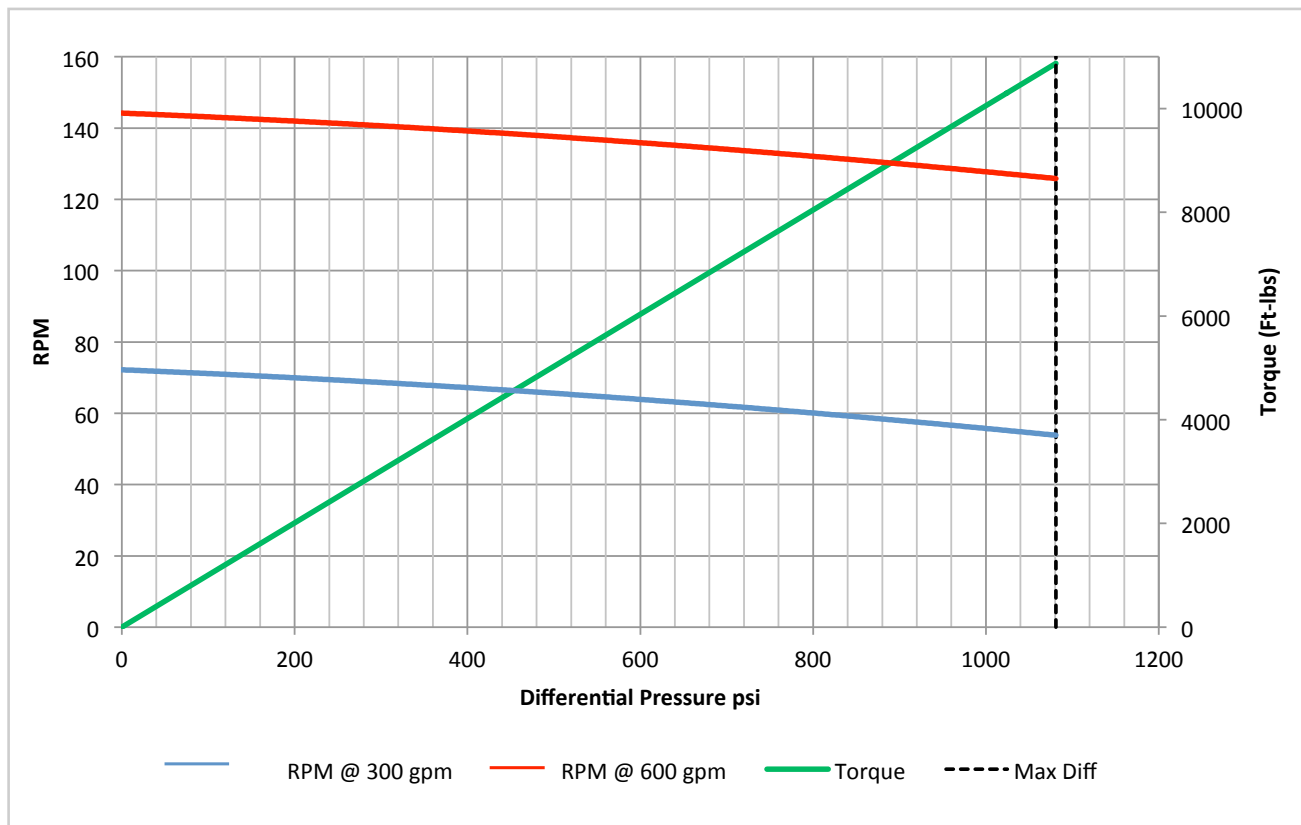

Performance curves for reference only. Data is based on new rotor and stator nominal dimensions. Performance downhole may vary based on drilling conditions and rotor/stator fit. Operating over the specified limits may result in damage to the power section and/or connected components. Information is subject to change.