



PV Fluid Products

SPECIFICATION SHEET FOR: 4 3/4" 7:8 LOBE 2.6 STAGE (SS) TR75 GROUP 2

PV475726-TR-2


Rotor Details	
Overall Length (in)	220.0
Head Length (in)	5.25
Head Diameter (in)	2.75
Contour OD (in)	3.094
Ecc (in)	0.172
C to V (in)	2.750
Weight (lbs)	317.0
Std Connection	2 3/8" HEF

Stator Details	
Overall Length (in)	229.3
Tube OD (in)	4.75
Tube ID (in)	3.75
Alternate OD (in)	5.00
Std Cutbacks (in)	8.00
Weight (lbs)	474

Recommended Operating Range	
Flow Rate	100 gpm-300 gpm
No Load RPM	26-78
Displacement	0.26 revs/gal
Max Working Pressure	506 psi
Max Off-BTM Pressure	178 psi
Max Operating Torque	4555 ft-lbs
Torque Slope	9.631 ft-lbs/psi
Max Operating pressure = Max Working psi - Max Off-BTM psi	
For Maximum Life do not exceed 328 psi differential.	

Sizing and Fit Information	
Vector Minor (in)	2.765
Shop Fit @ 70°F	- 0.015 Loose
Temp Correction Factor*	7
* Temp correction factor is the degrees (F) required to change the stator size by .001" on diameter.	

Theoretical performance with water at Operating Temperature

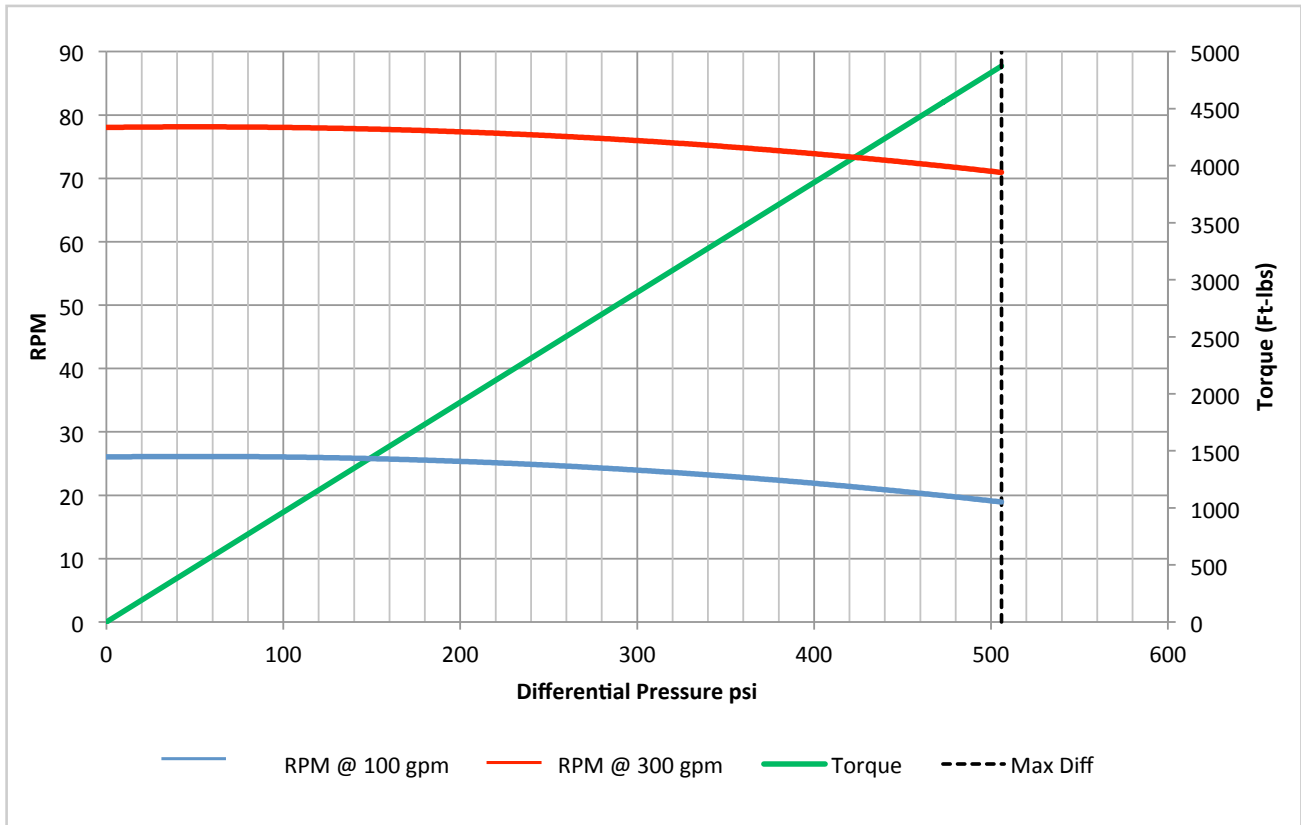

Performance curves for reference only. Data is based on new rotor and stator nominal dimensions. Performance downhole may vary based on drilling conditions and rotor/stator fit. Operating over the specified limits may result in damage to the power section and/or connected components. Information is subject to change.