



PV Fluid Products

# SPECIFICATION SHEET FOR: 6 1/4" 7:8 LOBE 3.3 STAGE (SS) HS88 GROUP 0

## PV625733-HS-0


Rotor Details	
Overall Length (in)	252.0
Head Length (in)	7.00
Head Diameter (in)	4.00
Contour OD (in)	4.210
Ecc (in)	0.235
C to V (in)	3.741
Weight (lbs)	740.0

Recommended Operating Range	
Flow Rate	300 gpm-500 gpm
No Load RPM	48-80
Displacement	0.16 revs/gal
Max Working Pressure	945 psi
Max Off-BTM Pressure	172 psi
Max Operating Torque	14241 ft-lbs
Torque Slope	16.369 ft-lbs/psi
Max Operating pressure = Max Working psi - Max Off-BTM psi	
For Maximum Life do not exceed 773 psi differential.	

Stator Details	
Overall Length (in)	260.0
Tube OD (in)	6.25
Tube ID (in)	5.00
Alternate OD (in)	6.50
Std Cutbacks (in)	8.00
Weight (lbs)	873

Sizing and Fit Information	
Vector Minor (in)	3.735
Shop Fit @ 70°F	0.006 Compression
Temp Correction Factor*	6
* Temp correction factor is the degrees (F) required to change the stator size by .001" on diameter.	

Theoretical performance with water at Operating Temperature

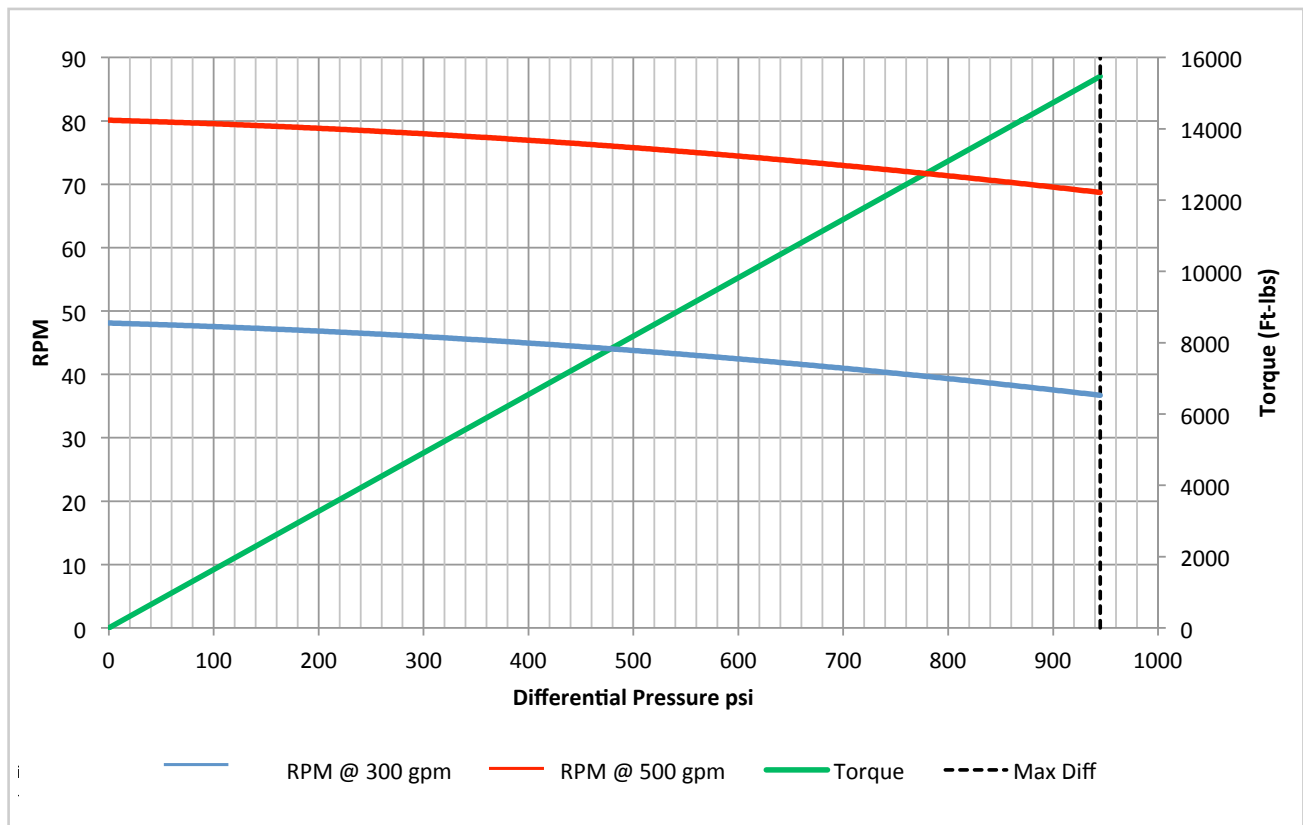

Performance curves for reference only. Data is based on new rotor and stator nominal dimensions. Performance downhole may vary based on drilling conditions and rotor/stator fit. Operating over the specified limits may result in damage to the power section and/or connected components. Information is subject to change.