



PV Fluid Products

# SPECIFICATION SHEET FOR: 6 3/4" 7:8 LOBE 5.7 STAGE HS88 GROUP 4

## PV675757-HS-4


Rotor Details	
Overall Length (in)	252.0
Head Length (in)	7.00
Head Diameter (in)	4.50
Contour OD (in)	4.646
Ecc (in)	0.247
C to V (in)	4.153
Weight (lbs)	866.0

Stator Details	
Overall Length (in)	260.0
Tube OD (in)	6.75
Tube ID (in)	5.50
Alternate OD (in)	7.00
Std Cutbacks (in)	8.00
Weight (lbs)	957

Recommended Operating Range	
Flow Rate	300 gpm-600 gpm
No Load RPM	72-144
Displacement	0.24 revs/gal
Max Working Pressure	1645 psi
Max Off-BTM Pressure	136 psi
Max Operating Torque	15922 ft-lbs
Torque Slope	10.058 ft-lbs/psi
Max Operating pressure = Max Working psi - Max Off-BTM psi	
<b>For Maximum Life do not exceed 1509 psi differential.</b>	

Sizing and Fit Information	
Vector Minor (in)	4.161
Shop Fit @ 70°F	- 0.008 Loose
Temp Correction Factor*	5.5
* Temp correction factor is the degrees (F) required to change the stator size by .001" on diameter.	

Theoretical performance with water at Operating Temperature

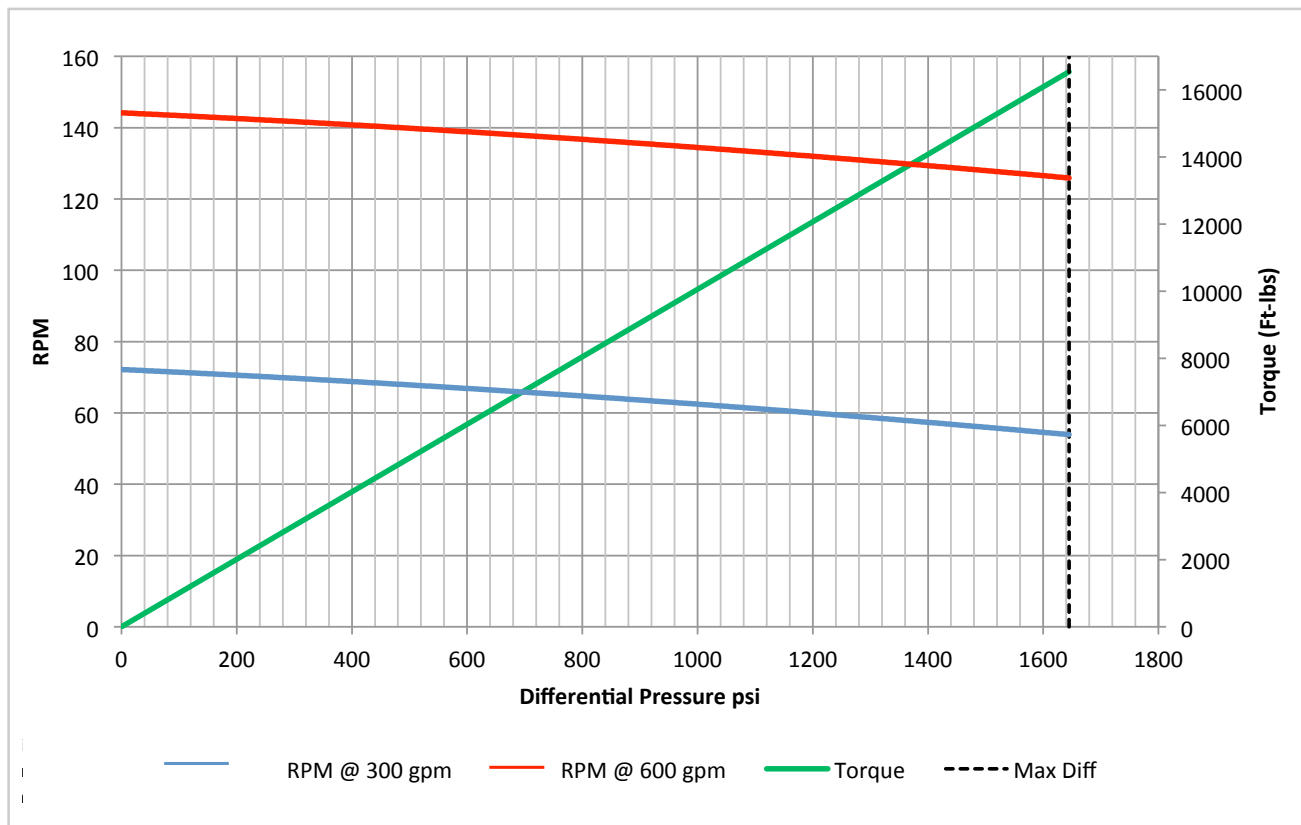

Performance curves for reference only. Data is based on new rotor and stator nominal dimensions. Performance downhole may vary based on drilling conditions and rotor/stator fit. Operating over the specified limits may result in damage to the power section and/or connected components. Information is subject to change.