



PV Fluid Products

SPECIFICATION SHEET FOR: 9 5/8" 6:7 LOBE 5.0 STAGE TR75 GROUP 0

PV962650-TR-0


Rotor Details	
Overall Length (in)	202.0
Head Length (in)	7.00
Head Diameter (in)	5.50
Contour OD (in)	6.403
Ecc (in)	0.428
C to V (in)	5.548
Weight (lbs)	1173.0
Std Connection	4" FH

Stator Details	
Overall Length (in)	208.0
Tube OD (in)	9.63
Tube ID (in)	7.88
Alternate OD (in)	NA
Std Cutbacks (in)	9.00
Weight (lbs)	1562

Recommended Operating Range	
Flow Rate	600 gpm-1200 gpm
No Load RPM	78-156
Displacement	0.13 revs/gal
Max Working Pressure	828 psi
Max Off-BTM Pressure	127 psi
Max Operating Torque	14011 ft-lbs
Torque Slope	18.079 ft-lbs/psi
Max Operating pressure = Max Working psi - Max Off-BTM psi	
For Maximum Life do not exceed 701 psi differential.	

Sizing and Fit Information	
Vector Minor (in)	5.535
Shop Fit @ 70°F	0.013 Compression
Temp Correction Factor*	3
* Temp correction factor is the degrees (F) required to change the stator size by .001" on diameter.	

Theoretical performance with water at Operating Temperature

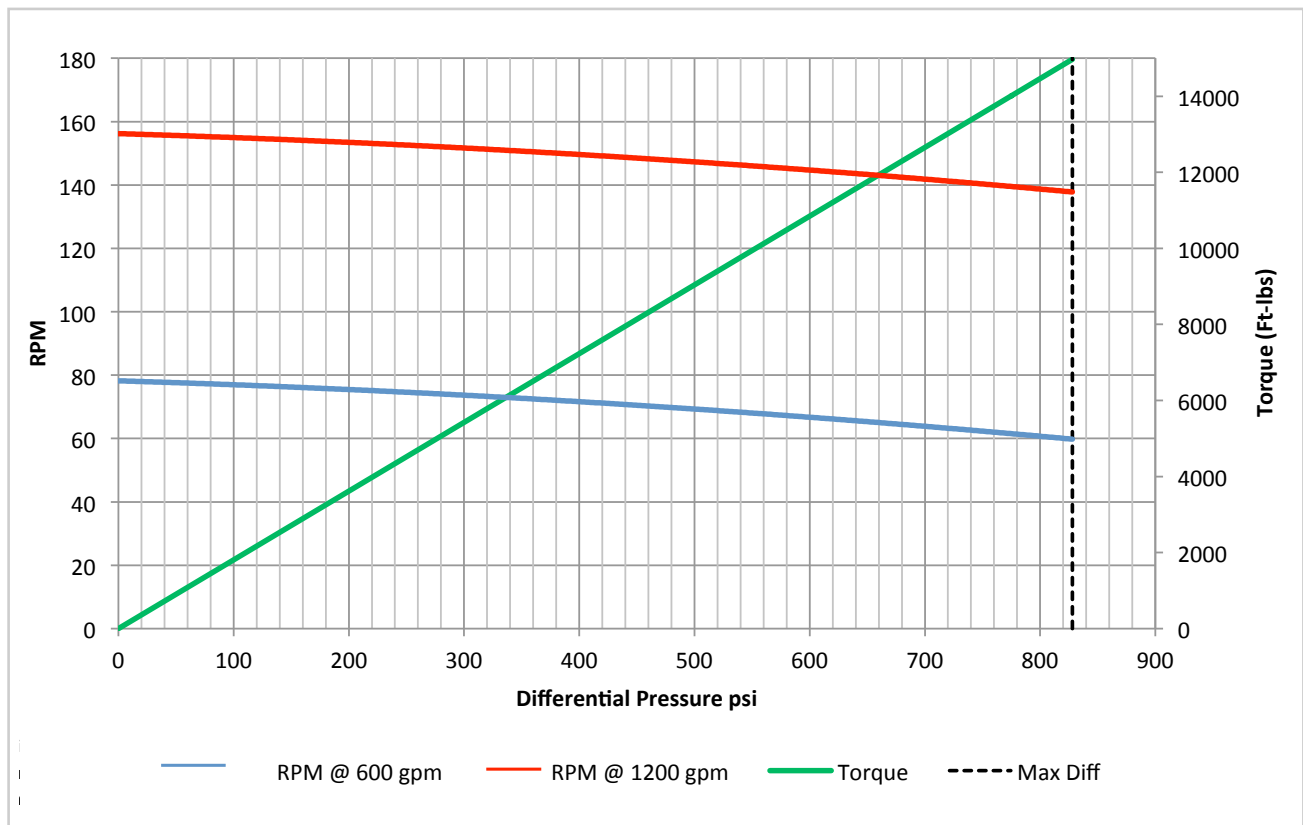

Performance curves for reference only. Data is based on new rotor and stator nominal dimensions. Performance downhole may vary based on drilling conditions and rotor/stator fit. Operating over the specified limits may result in damage to the power section and/or connected components. Information is subject to change.